


MINIFLEX ROBUST

To completion of the Miniflex series for rough industrial environments we have developed the Miniflex Robust. Its flexible, high-resolution image guide makes it nearly unbreakable. For the Ø 2.7 mm version, side-view models are available on request.

Basic Units

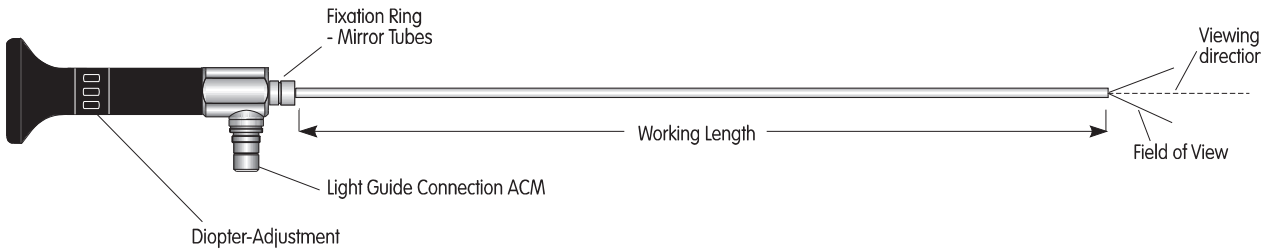

Code No.	Working diameter (mm)	Working length (mm)	Viewing direction	Field of View	Image bundle (pix.)
----------	-----------------------	---------------------	-------------------	---------------	---------------------

MR.12150.0045	1.2	150	0°	45°	10,000
MR.12250.0045	1.2	250	0°	45°	10,000
MR.27150.0045	2.7	150	0°	45°	30,000
MR.27250.0045	2.7	250	0°	45°	30,000
MR.27500.004	2.7	500	0°	45°	30,000

Rotatable Mirror Tubes

For easy all-round inspection in bores or tubes. Simple snap-lock connection to basic unit.

Working diameter incl. mirror tube = +0.3 mm

Color-coding for viewing directions: 70°=green, 90°=red, 110°=yellow.



Code No.	Diameter Basic unit (mm)	Viewing direction	Length (mm)
----------	--------------------------	-------------------	-------------

RS.15150.70	1.2	70°	150
RS.15250.70	1.2	70°	250
RS.30150.70	2.7	70°	150
RS.30250.70	2.7	70°	250
RS.30500.70	2.7	70°	500

RS.15150.90	1.2	90°	150
RS.15250.90	1.2	90°	250
RS.30150.90	2.7	90°	150
RS.30250.90	2.7	90°	250
RS.30500.90	2.7	90°	500

RS.15150.110	1.2	110°	150
RS.15250.110	1.2	110°	250
RS.30150.110	2.7	110°	150
RS.30250.110	2.7	110°	250
RS.30500.110	2.7	110°	500