


FLEXILUX STANDARD BORESCOPIES

Ø 8 mm / 10 mm

The Flexilux Standard Boreoscope with fixed objective and fixfocus - The ideal instrument for repetitive applications in rough industrial environments.

Basic Units

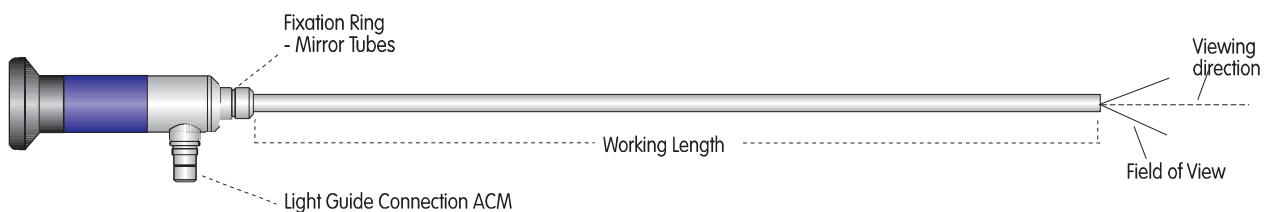

Code No.	Ø	Working Length (mm)	Viewing Direction	Field of View	Application
FF.08275.0040	8.0	275	0°	40°	For use with or without mirror tubes
FF.08480.0040	8.0	480	0°	40°	For use with or without mirror tubes
FF.10275.0040	10.0	275	0°	40°	For use with or without mirror tubes
FF.10480.0040	10.0	480	0°	40°	For use with or without mirror tubes

Rotatable Mirror Tubes

For easy all around inspection in bores or tubes. Simple snap lock connection to basic unit (to be used with basic unit 00/40). Color-coding for viewing directions: 70°=green, 90°=red, 110°=yellow.

Working diameter incl. mirror tube = 8.5 mm /10.5 mm.

	Code No.	Ø	Viewing Direction	Length (mm)
	FS.08275.70	8.5	70°	275
	FS.08480.70	8.5	70°	480
	FS.10275.70	10.5	70°	275
	FS.10480.70	10.5	70°	480
	FS.08275.90	8.5	90°	275
	FS.08480.90	8.5	90°	480
	FS.10275.90	10.5	90°	275
	FS.10480.90	10.5	90°	480
	FS.08275.110	8.5	110°	275
	FS.08480.110	8.5	110°	480
	FS.10275.110	10.5	110°	275
	FS.10480.110	10.5	110°	480